




### Description

Super-junction MOSFET Gen I is designed by WL-Micro Semiconductor Company, according to the SJ principle. This device provides an excellent Gate charge and  $R_{DS(on)}$ , which leads to extremely low conduction and switching losses. So it is very suitable for AC/DC power conversion, Laptop adapter, Lighting, and industrial power applications.




### Features

- Very low FOM  $R_{DS(on)} \times Q_g$
- 100% avalanche tested
- Easy to use/drive
- Ultra-fast body diode
- RoHS compliant

### Applications

- Switch Mode Power Supply (SMPS)
- Uninterruptible Power Supply (UPS)
- Suitable for hard and soft switching (PFC and high performance LLC)
- Telecom and Solar inverter

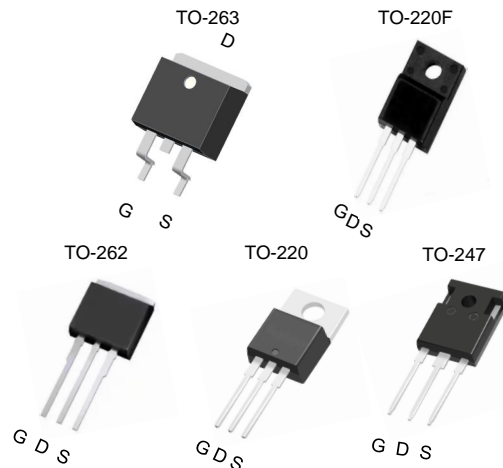

### Key Performance Parameters

Parameter	Value	Unit
$V_{DS} @ T_{j,max}$	700	V
$R_{DS(on),max}$	0.105	$\Omega$
$Q_{g,typ}$	64.5	nC
$I_D$	40	A
$I_{D,pulse}$	120	A
$E_{OSS} @ 400V$	7.98	$\mu J$
Body Diode $di_T/dt$	900	A/ $\mu s$

### Device Marking and Package Information

Device	Package	Marking
WLE105R650	TO-263	WLE105R650
WLP105R650F	TO-220F	WLP105R650F
WLP105R650B	TO-262	WLP105R650B
WLP105R650	TO-220	WLP105R650
WLP105R650E	TO-247	WLP105R650E



<b>Absolute Maximum Ratings</b> $T_C = 25^\circ\text{C}$ , unless otherwise noted			
Parameter	Symbol	Value	Unit
Drain-Source voltage( $V_{GS}=0\text{V}$ )	$V_{DS}$	650	V
Continuous Drain Current <sup>1)</sup>	$I_D$	$T_C = 25^\circ\text{C}$	40
		$T_C = 100^\circ\text{C}$	24
Pulsed Drain Current <sup>2)</sup>	$I_{D,pulse}$	120	A
Gate-Source Voltage	$V_{GS}$	$\pm 30$	V
Single Pulse Avalanche Energy	$E_{AS}$	796	mJ
Repetitive Avalanche Energy	$E_{AR}$	1.2	mJ
Avalanche Current	$I_{AR}$	6.6	A
MOSFET $dv/dt$ Ruggedness, $V_{DS} = 0 \dots 480\text{V}$	$dv/dt$	50	V/ns
Power Dissipation For TO-263、TO-262、TO-220、TO-247	$P_D$	278	W
Power Dissipation For TO-220F		35	
Continuous Diode Forward Current	$I_S$	40	A
Diode Pulsed Current <sup>2)</sup>	$I_{S,pulse}$	120	
Reverse Diode $dv/dt$ <sup>3)</sup>	$dv/dt$	50	V/ns
Maximum Diode Commutation Speed	$di/dt$	900	A/ $\mu\text{s}$
Operating Junction and Storage Temperature Range	$T_J, T_{stg}$	-55~+150	$^\circ\text{C}$

<b>Thermal Resistance For TO-263、TO-262、TO-220、TO-247</b>			
Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case	$R_{thJC}$	0.45	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction-to-Ambient	$R_{thJA}$	62	

<b>Thermal Resistance For TO-220F</b>			
Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case	$R_{thJC}$	3.6	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction-to-Ambient	$R_{thJA}$	80	

### Notes

- 1) Limited by maximum junction temperature.
- 2) Repetitive Rating: Pulse width limited by maximum junction temperature.
- 3) Identical low side and high side switch with identical  $R_G$ .



Electrical Characteristics $T_J = 25^\circ\text{C}$ , unless otherwise noted						
Parameter	Symbol	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
<b>Static Characteristics</b>						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	650	--	--	V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS} = 650V$ $V_{GS} = 0V, T_J = 25^\circ\text{C}$	--	--	4	$\mu A$
		$V_{DS} = 650V$ , $V_{GS} = 0V, T_J = 150^\circ\text{C}$	--	--	4000	
Gate-Source Leakage Current	$I_{GSS}$	$V_{GS} = \pm 30V$	--	--	$\pm 100$	nA
Gate-Source Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	3.0	4.0	5.0	V
Drain-Source On-State-Resistance	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 20A$	--	0.092	0.105	$\Omega$
Gate Resistance	$R_G$	$f = 1.0\text{MHz}$ open drain	--	3	--	$\Omega$
<b>Dynamic Characteristics</b>						
Input Capacitance	$C_{iss}$	$V_{GS} = 0V$ , $V_{DS} = 100V$ $f = 1.0\text{MHz}$	--	2940	--	$\mu F$
Output Capacitance	$C_{oss}$		--	102	--	
Reverse Transfer Capacitance	$C_{rss}$		--	3.5	--	
Total Gate Charge	$Q_g$	$V_{DD} = 520V, I_D = 40A$ $V_{GS} = 10V$	--	64.5	--	nC
Gate-Source Charge	$Q_{gs}$		--	20.0	--	
Gate-Drain Charge	$Q_{gd}$		--	25.4	--	
Gate Plateau Voltage	$V_{Plateau}$		--	6.6	--	V
Turn-on Delay Time	$t_{d(on)}$	$V_{DD} = 400V, I_D = 40A$ $R_G = 15\Omega, V_{GS} = 10V$	--	20	--	ns
Turn-on Rise Time	$t_r$		--	15	--	
Turn-off Delay Time	$t_{d(off)}$		--	70	--	
Turn-off Fall Time	$t_f$		--	8	--	
<b>Drain-Source Body Diode Characteristics</b>						
Body Diode Forward Voltage	$V_{SD}$	$T_J = 25^\circ\text{C}, I_{SD} = 20A$ , $V_{GS} = 0V$	--	1.0	1.5	V
Reverse Recovery Time	$t_{rr}$	$V_R = 400V$ $I_F = 20A, di_F/dt = 100A/\mu s$	--	165	--	ns
Reverse Recovery Charge	$Q_{rr}$		--	1.2	--	$\mu C$
Peak Reverse Recovery Current	$I_{rrm}$		--	14	--	A



Typical Characteristics  $T_J = 25^\circ\text{C}$ , unless otherwise noted

Figure 1. Transient Thermal Impedance For TO-263/262/220/247

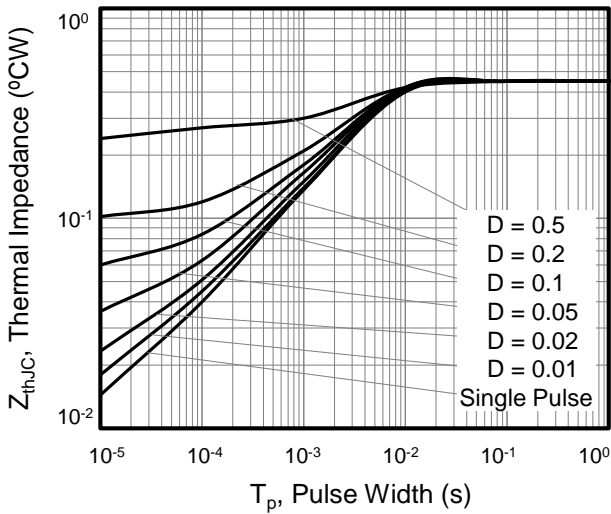


Figure 2. Transient Thermal Impedance For TO-220F

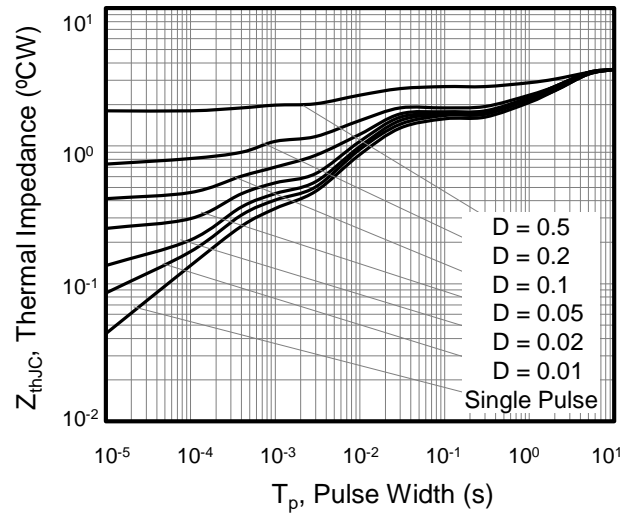


Figure 3. Safe Operation Area For TO-263/262/220/247

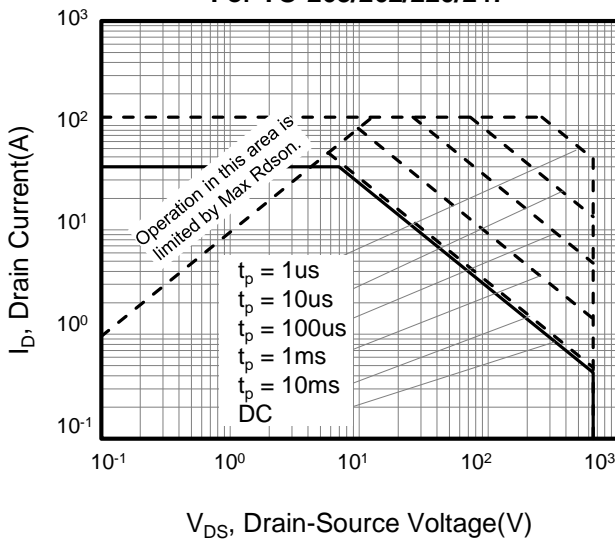


Figure 4. Safe Operation Area For TO-220F

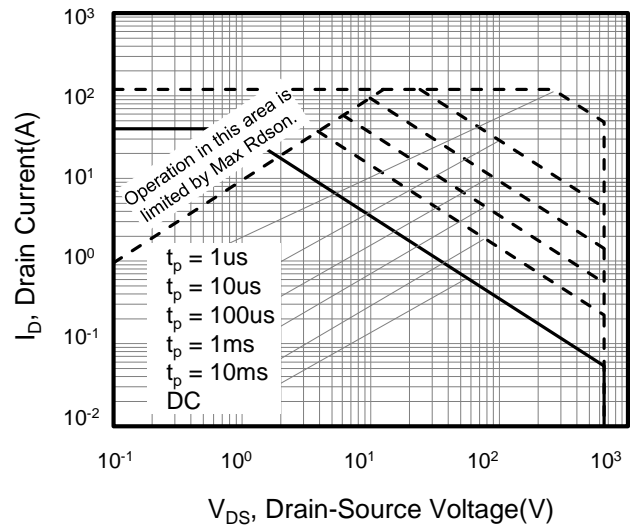


Figure 5. Output Characteristics


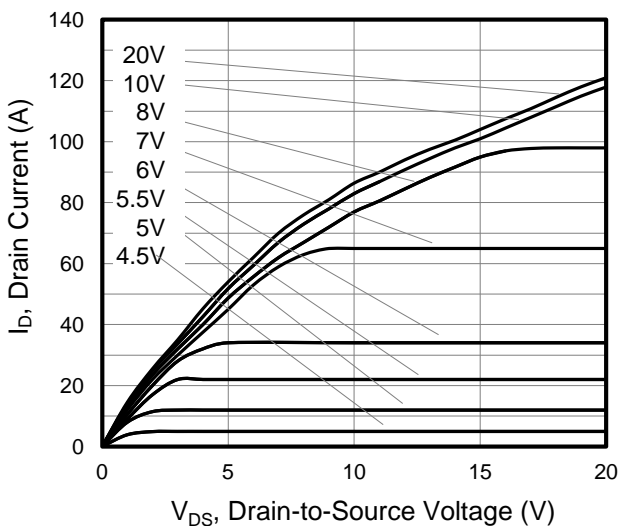


Figure 6. Transfer Characteristics



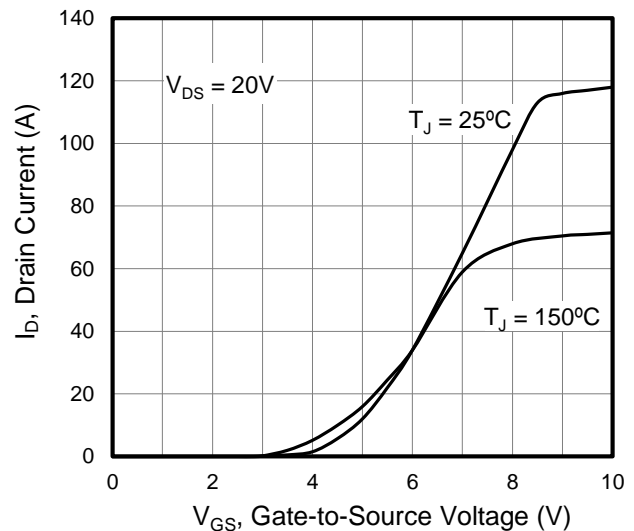

Typical Characteristics  $T_J = 25^\circ\text{C}$ , unless otherwise noted

Figure 7. On-Resistance vs. Drain Current

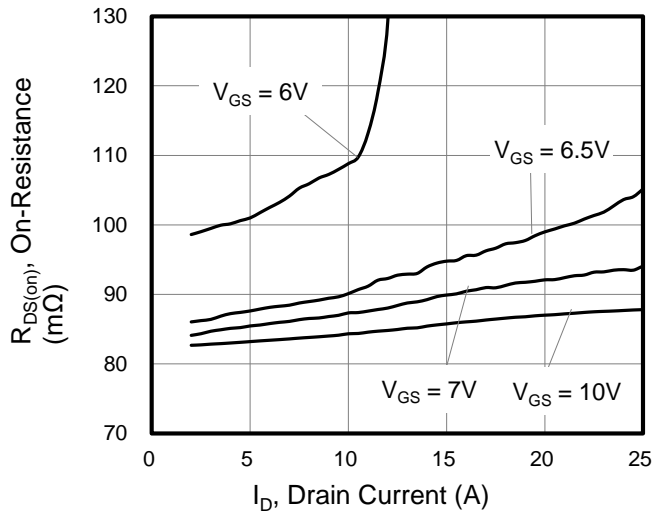


Figure 8. Capacitance

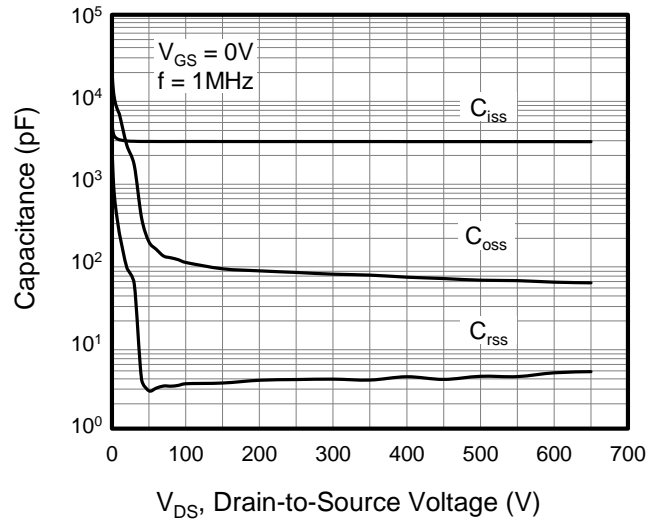


Figure 9. Gate Charge

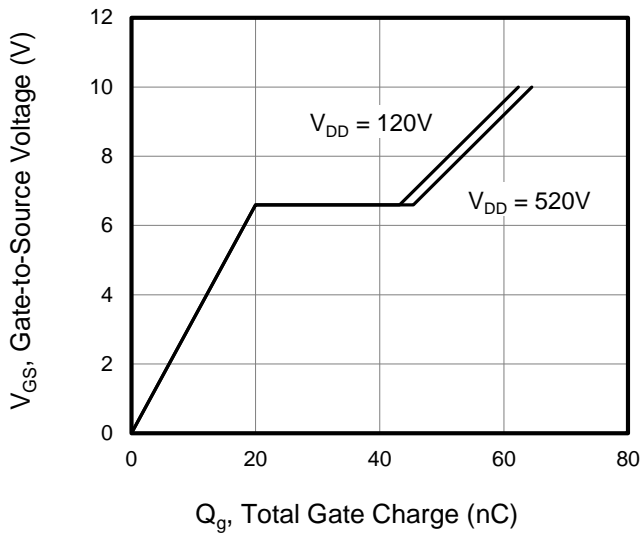


Figure 10. Body Diode Forward Voltage

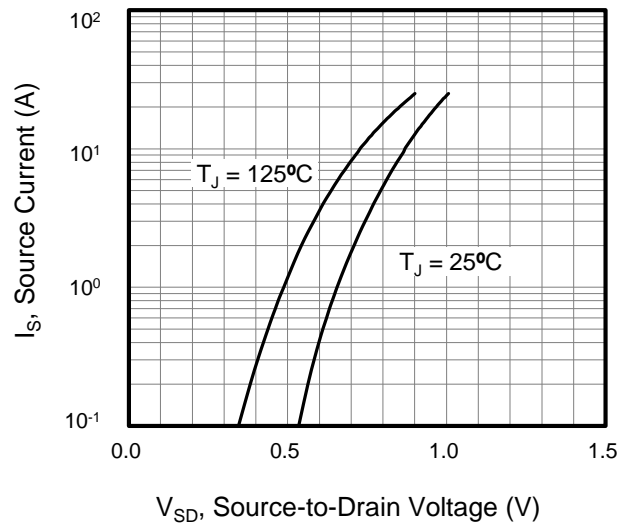


Figure 11. Typ.  $C_{oss}$  Stored Energy


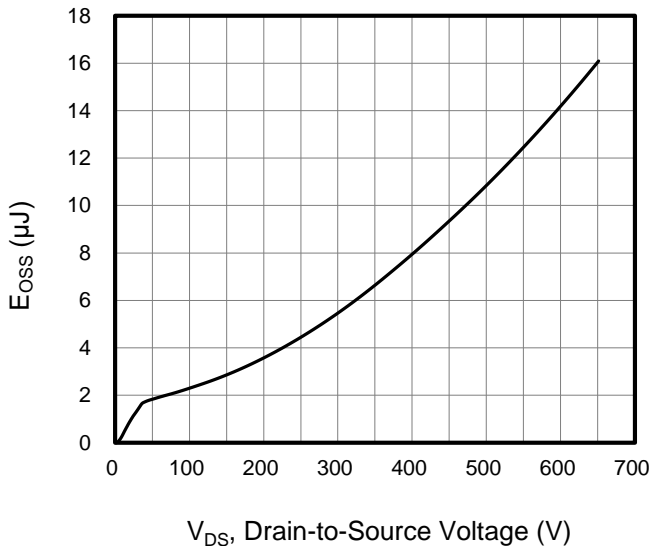



Figure 12. On-Resistance vs. Temperature



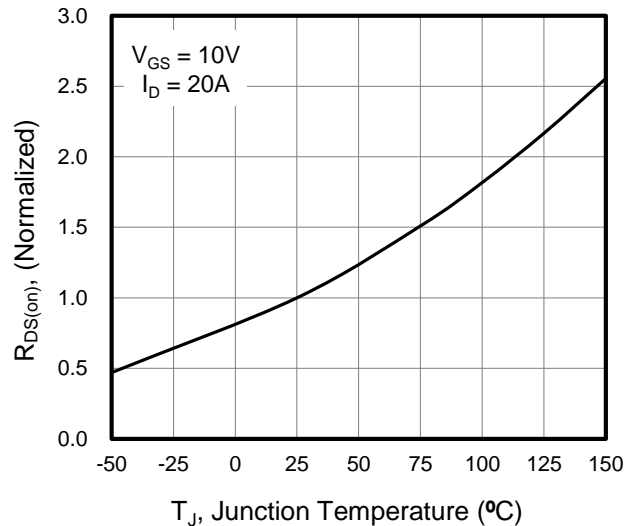


Typical Characteristics  $T_J = 25^\circ\text{C}$ , unless otherwise noted

Figure 13. Breakdown Voltage vs. Junction Temperature

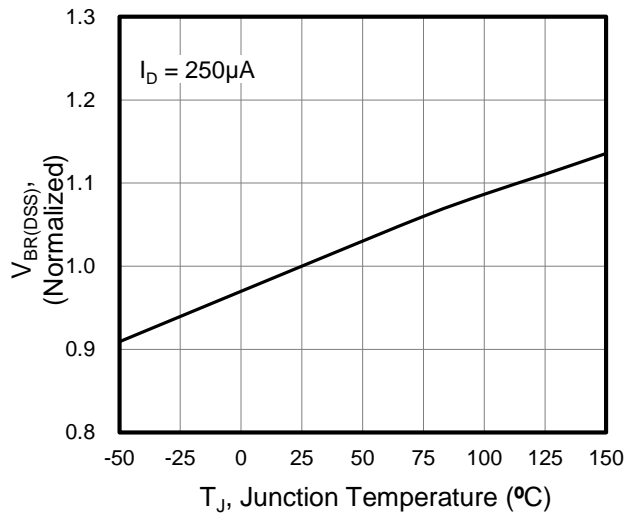





**Figure A: Gate Charge Test Circuit and Waveform**

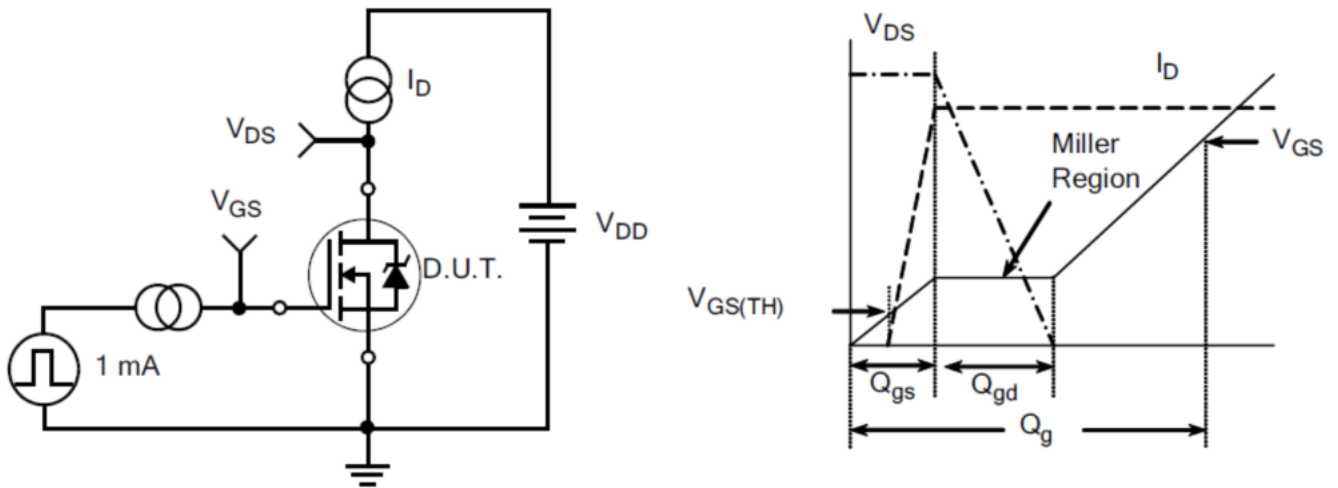

**Figure B: Resistive Switching Test Circuit and Waveform**

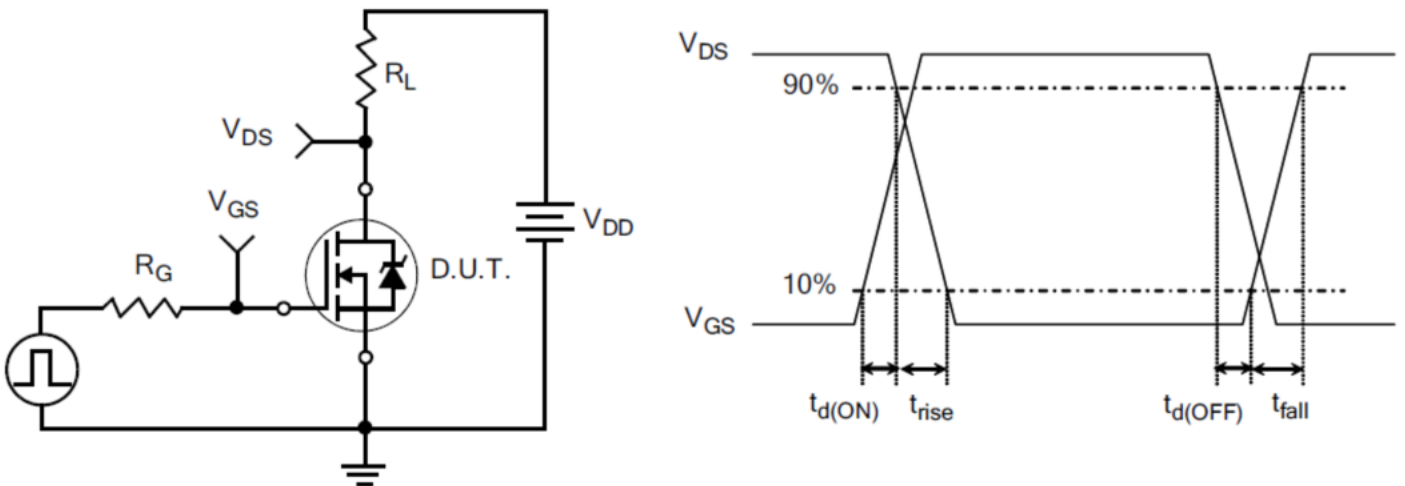


**Figure C: Unclamped Inductive Switching Test Circuit and Waveform**

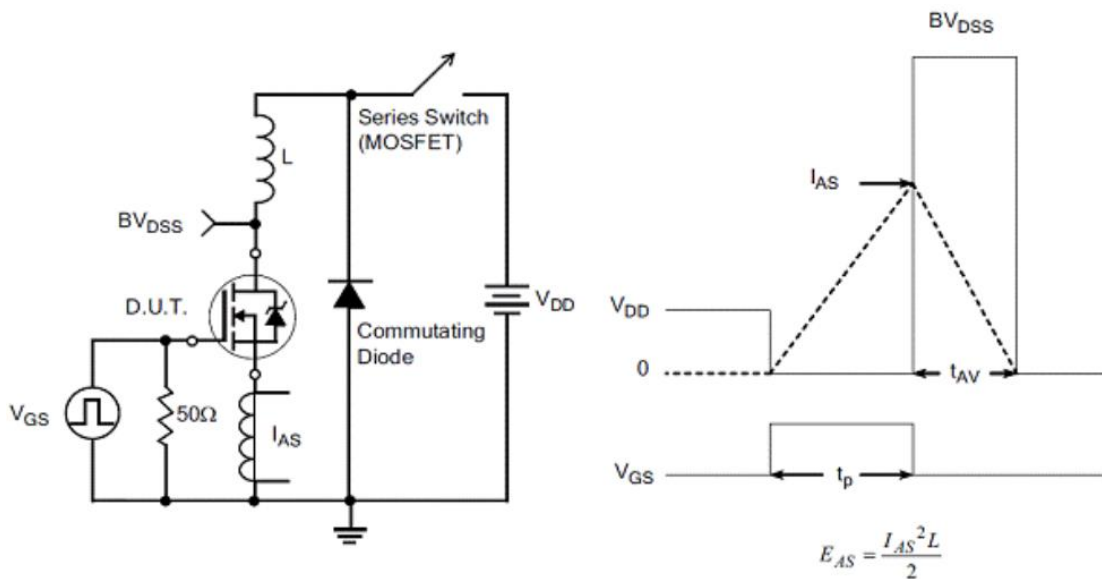



### TO-263

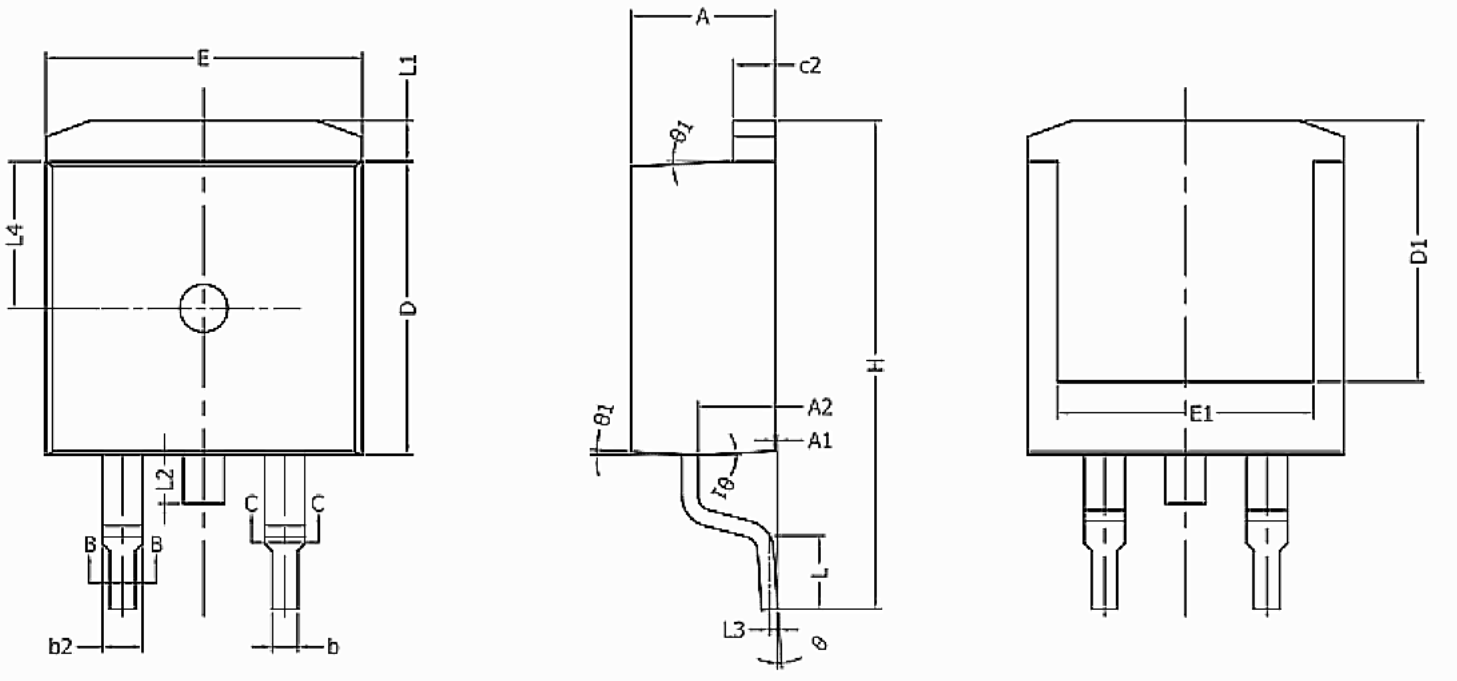

Unit:mm			
Symbol	Min.	Nom	Max.
A	4.40	4.50	4.60
A1	0	0.10	0.25
A2	2.20	2.40	2.60
b	0.76	---	0.89
b1	0.75	0.80	0.85
b2	1.23	---	1.37
b3	1.22	1.27	1.32
c	0.47	---	0.60
c1	0.46	0.51	0.56
c2	1.25	1.30	1.35
D	9.10	9.20	9.30

Unit:mm			
Symbol	Min.	Nom	Max.
D1	8.00	---	---
E	9.80	9.90	10.00
E1	7.80	---	---
e	2.54 BSC		
H	14.90	15.30	15.70
L	2.00	2.30	2.60
L1	1.17	1.27	1.40
L2	---	---	1.75
L3	0.25 BSC		
L4	4.60 REF		
theta	0°	---	8°
theta1	1°	3°	5°




#### Ordering information For TO-263

Package	Units/Tape	Tapes/ Inner Box	Units/Inner Box	Inner Box/Carton Box	Units/Carton Box
TO-263	800	1	800	10	8000





TO-220F

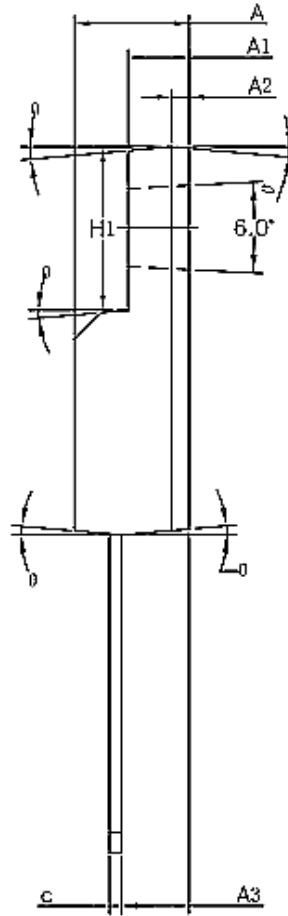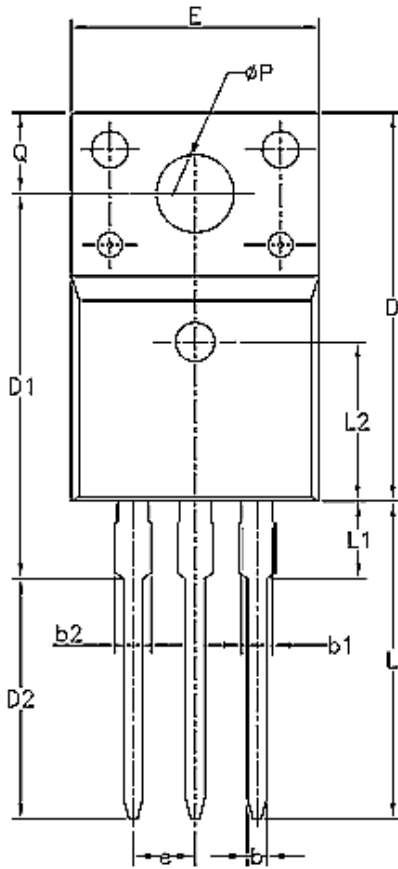

Unit:mm			
Symbol	Min.	Nom	Max.
A	4.50	4.70	4.83
A1	2.34	2.54	2.74
A2	0.70 REF		
A3	2.56	2.76	2.93
b	0.70	---	0.90
b1	1.18	---	1.38
b2	---	---	1.47
c	0.45	0.50	0.60
D	15.67	15.87	16.07
D1	15.55	15.75	15.95


Unit:mm			
Symbol	Min.	Nom	Max.
D2	9.60	9.80	10.0
E	9.96	10.16	10.36
e	2.54 BSC		
H1	6.48	6.68	6.88
L	12.68	12.98	13.28
L1	---	---	3.50
L2	6.50 REF		
ΦP	3.08	3.18	3.28
Q	3.20	---	3.40
θ1	1°	3°	5°

Ordering information For TO-220F

Package	Units/Tube	Tubes/ Inner Box	Units/Inner Box	Inner Box/Carton Box	Units/Carton Box
TO-220F	50	40	2000	4	8000



### TO-262

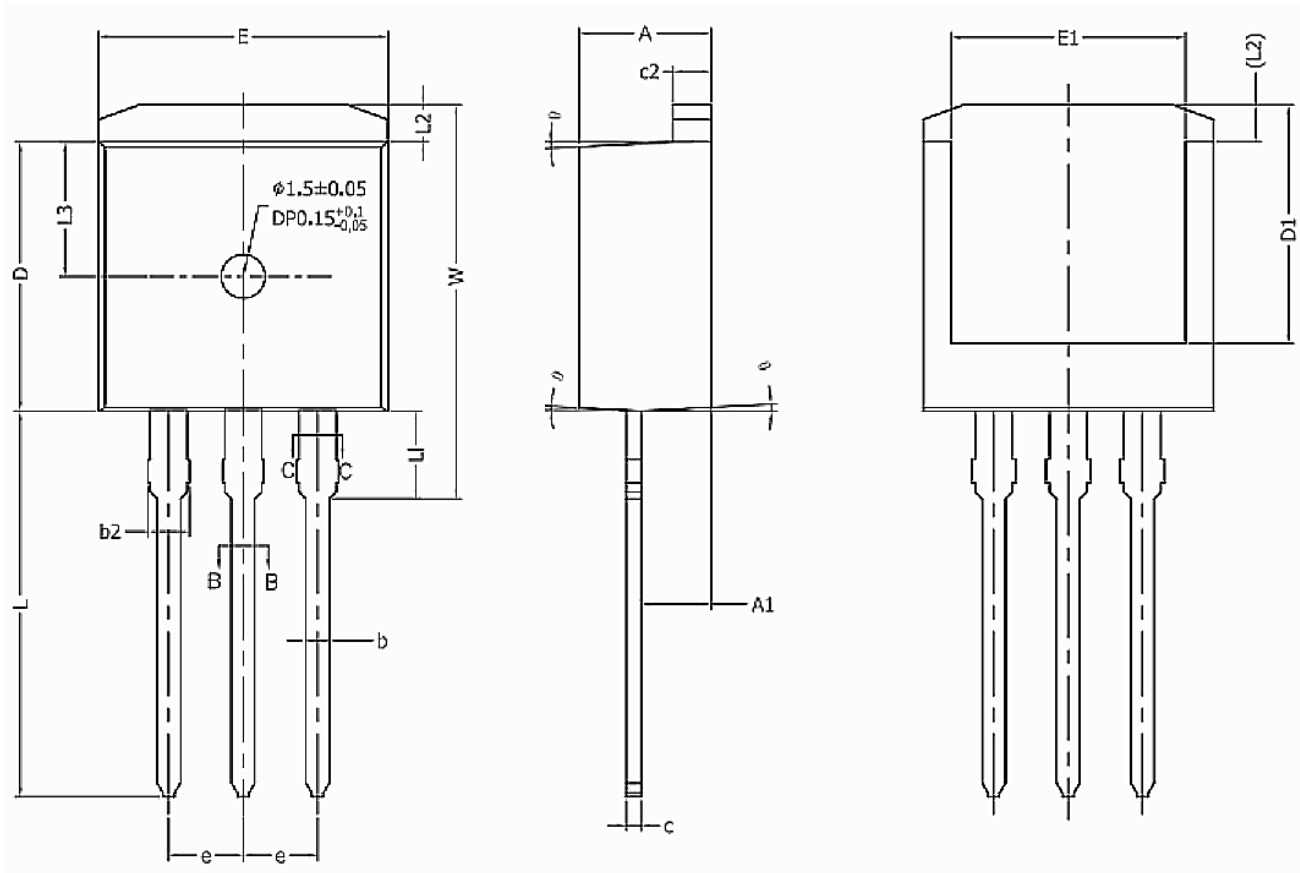

Unit:mm			
Symbol	Min.	Nom	Max.
A	4.40	4.50	4.60
A1	2.20	2.40	2.60
b	0.76	---	0.89
b1	0.75	0.80	0.85
b2	1.23	---	1.37
b3	1.22	1.27	1.32
c	0.47	---	0.60
c1	0.46	0.51	0.56
c2	1.25	1.30	1.35
D	9.10	9.20	9.30


Unit:mm			
Symbol	Min.	Nom	Max.
D1	8.00	---	---
E	9.80	9.90	10.00
E1	7.80	---	---
e	2.54 BSC		
L	12.90	13.20	13.50
L1	2.80	3.00	3.20
L2	1.17	1.27	1.40
L3	4.60 REF		
W	13.25	---	14.00
theta	1°	3°	5°

#### Ordering information For TO-262

Package	Units/Tube	Tubes/ Inner Box	Units/Inner Box	Inner Box/Carton Box	Units/Carton Box
TO-262	50	40	2000	4	8000



TO-220

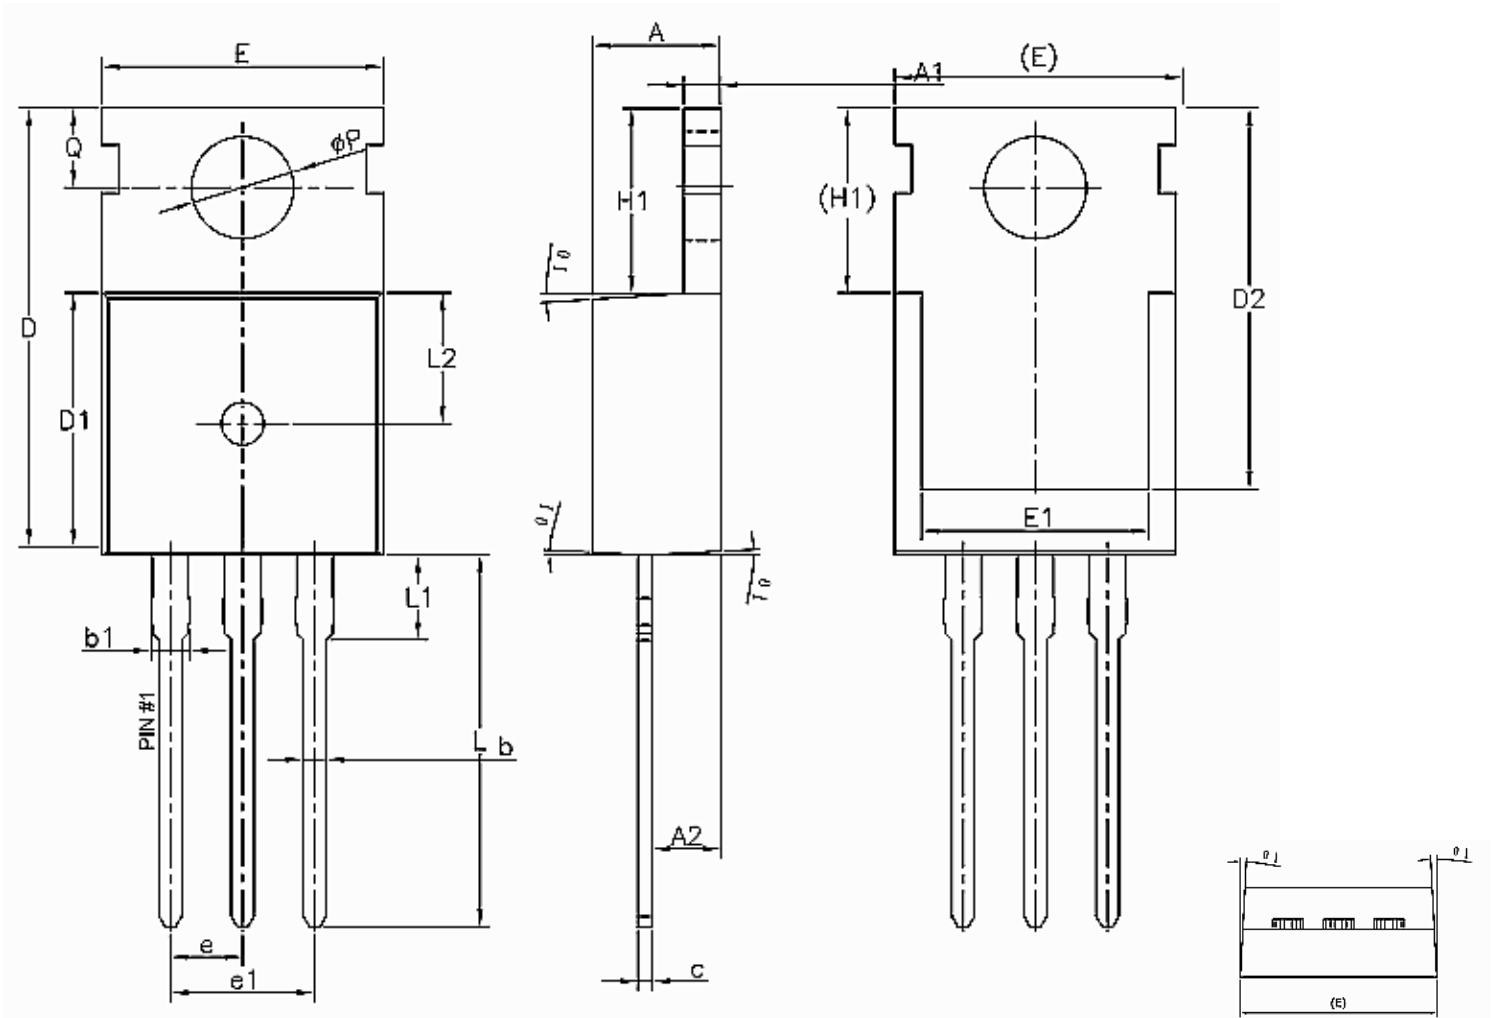

Unit:mm			
Symbol	Min.	Nom	Max.
A	4.40	4.50	4.60
A1	1.27	1.30	1.33
A2	2.30	2.40	2.50
b	0.70	---	0.90
b2	1.27	---	1.40
c	0.45	0.50	0.60
D	15.30	15.70	16.10
D1	9.10	9.20	9.30
D2	13.10	---	13.70
E	9.70	9.90	10.20





Unit:mm			
Symbol	Min.	Nom	Max.
E1	7.80	8.00	8.20
e	2.54 BSC		
e1	5.08 BSC		
H1	6.30	6.50	6.70
L	12.78	13.08	13.38
L1	---	---	3.50
L2	4.60 REF		
ΦP	3.55	3.60	3.65
Q	2.73	---	2.87
θ1	1°	3°	5°

Ordering information For TO-220

Package	Units/Tube	Tubes/ Inner Box	Units/Inner Box	Inner Box/Carton Box	Units/Carton Box
TO-220	50	40	2000	4	8000



### TO-247

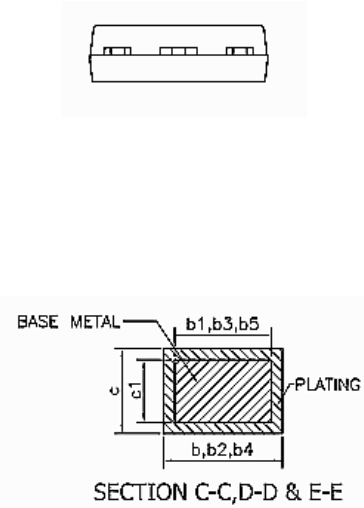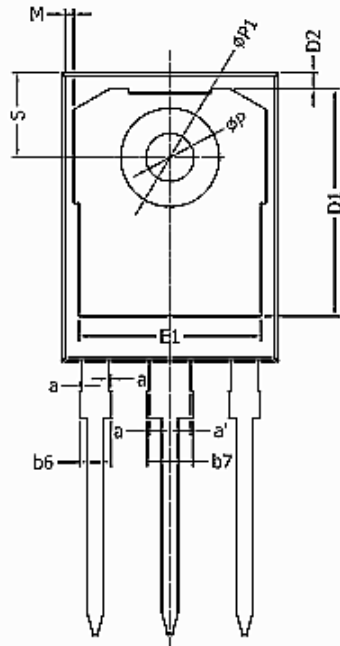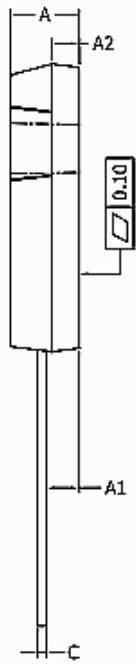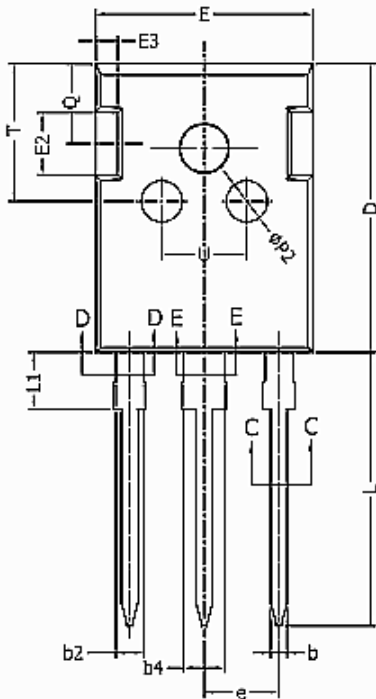

Unit:mm			
Symbol	Min.	Nom	Max.
A	4.90	5.00	5.10
A1	2.31	2.41	2.51
A2	1.90	2.00	2.10
a	0	---	0.15
a'	0	---	0.15
b	1.16	---	1.26
b1	1.15	1.2	1.22
b2	1.96	---	2.06
b3	1.95	2.00	2.02
b4	2.96	---	3.06
b5	2.96	3.00	3.02
b6	---	---	2.25
b7	---	---	3.25
c	0.59	---	0.66
c1	0.58	0.60	0.62
D	20.90	21.00	21.10
D1	16.25	16.55	16.85

Unit:mm			
Symbol	Min.	Nom.	Max.
D2	1.05	1.17	1.35
E	15.70	15.80	15.90
E1	13.10	13.30	13.50
E2	4.40	4.50	4.60
E3	2.40	2.50	2.60
e	5.436 BSC		
L	19.80	19.92	20.10
L1	---	---	4.30
M	0.35	---	0.95
P	3.40	3.50	3.60
P1	7.00	---	7.40
P2	2.40	2.50	2.60
Q	5.60	---	6.00
S	6.05	6.15	6.25
T	9.80	---	10.20
U	6.00	---	6.40

#### Ordering information For TO-247

Package	Units/Tube	Tubes/ Inner Box	Units/Inner Box	Inner Box/Carton Box	Units/Carton Box
TO-247	30	20	600	5	3000



## **Disclaimer**

Brunei has made reasonable commercial efforts to ensure that the information given in this datasheet is correct. However, it must clearly be understood that such information is for guidance only and does not constitute any representation or form part of any offer or contract.

For documents and material available from this datasheet, Brunei does not warrant or assume any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, product, technology or process disclosed hereunder.

Brunei reserves the rights to at its own discretion to make any changes or improvements to this datasheet. Unless said datasheet is incorporated into the formal contract, any customer should not rely on the information as any specification or product parameters duly committed by Brunei Customers are hereby advised to verify that the information contained herein is current and complete before the entering of any contract or acknowledgement of any purchase order. Accordingly, all products specified hereunder shall be sold subject to Brunei's terms and conditions supplied at the time of order acknowledgement. Except where agreed upon by contractual agreement, testing of all parameters of each product is not necessarily performed.

Brunei does not warrant or convey any license either expressed or implied under its patent rights, nor the rights of others. Reproduction of information contained herein shall be only permissible if such reproduction is without any modification or alteration. Reproduction of this information with any alteration is an unfair and deceptive business practice. Brunei is not responsible or liable for such altered documentation.

Resale of Brunei's products with statements different from or beyond the parameters stated by Brunei for that product or service voids all express or implied warranties for the associated Brunei's product or service and is unfair and deceptive business practice. Brunei is not responsible or liable for any such statements.

Brunei's products are not authorized for use as critical components in life support devices or systems without the express written approval of Brunei. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.